

SPECIFICATION FOR CTP+LCD MODULE

Part No.: MACHJT070TM023-V1

Customer No.:

Date: 2024-02-28

			Customer
Prepared	Checked	Approved	Approved

Record of Revision

Rev.	Description	Page	Date
0	Preliminary specification released		20240228

Table of Contents

1 General Specifications	4
2 Mechanical Drawing	5
3 Pin assignment	6
4 Absolute Maximum Rating	8
5 Electrical Characteristic	9
6 Signal Timing Specification	11
7 Optical Characteristics	15
8 Reliability Test	18
9 Appearance Inspection	19
10 Notices	23

1 General Specifications


1.1 Definition

The specification is used for capacitive touch module with TFT LCD & Backlight Unit.

1.2 Features and General Description

General	Specification	Unit	Note
Module size	7.0	inch	diagonal
Structure	GG+LCD. Optical Bonding		
Resolution	1024(RGB) × 600		
Display Mode	Normally Black. Transmissive		
Pixel Pitch	0.1506(W) × 0.1432(H)	mm	
Pixel Arrangement	RGB stripe		
Viewing direction	ALL	O'clock	
Outline dimensions	185.21(W) × 116.92(H) × 8.35(D)	mm	W/O PCBA
Active area	154.21(W) × 85.92(H)	mm	
LCD interface	LVDS 8bit		
CTP Interface	USB or I2C		
CTP IC	EXC81W32		
Touch point	10		
Surface hardness	6	H	

2 Mechanical Drawing

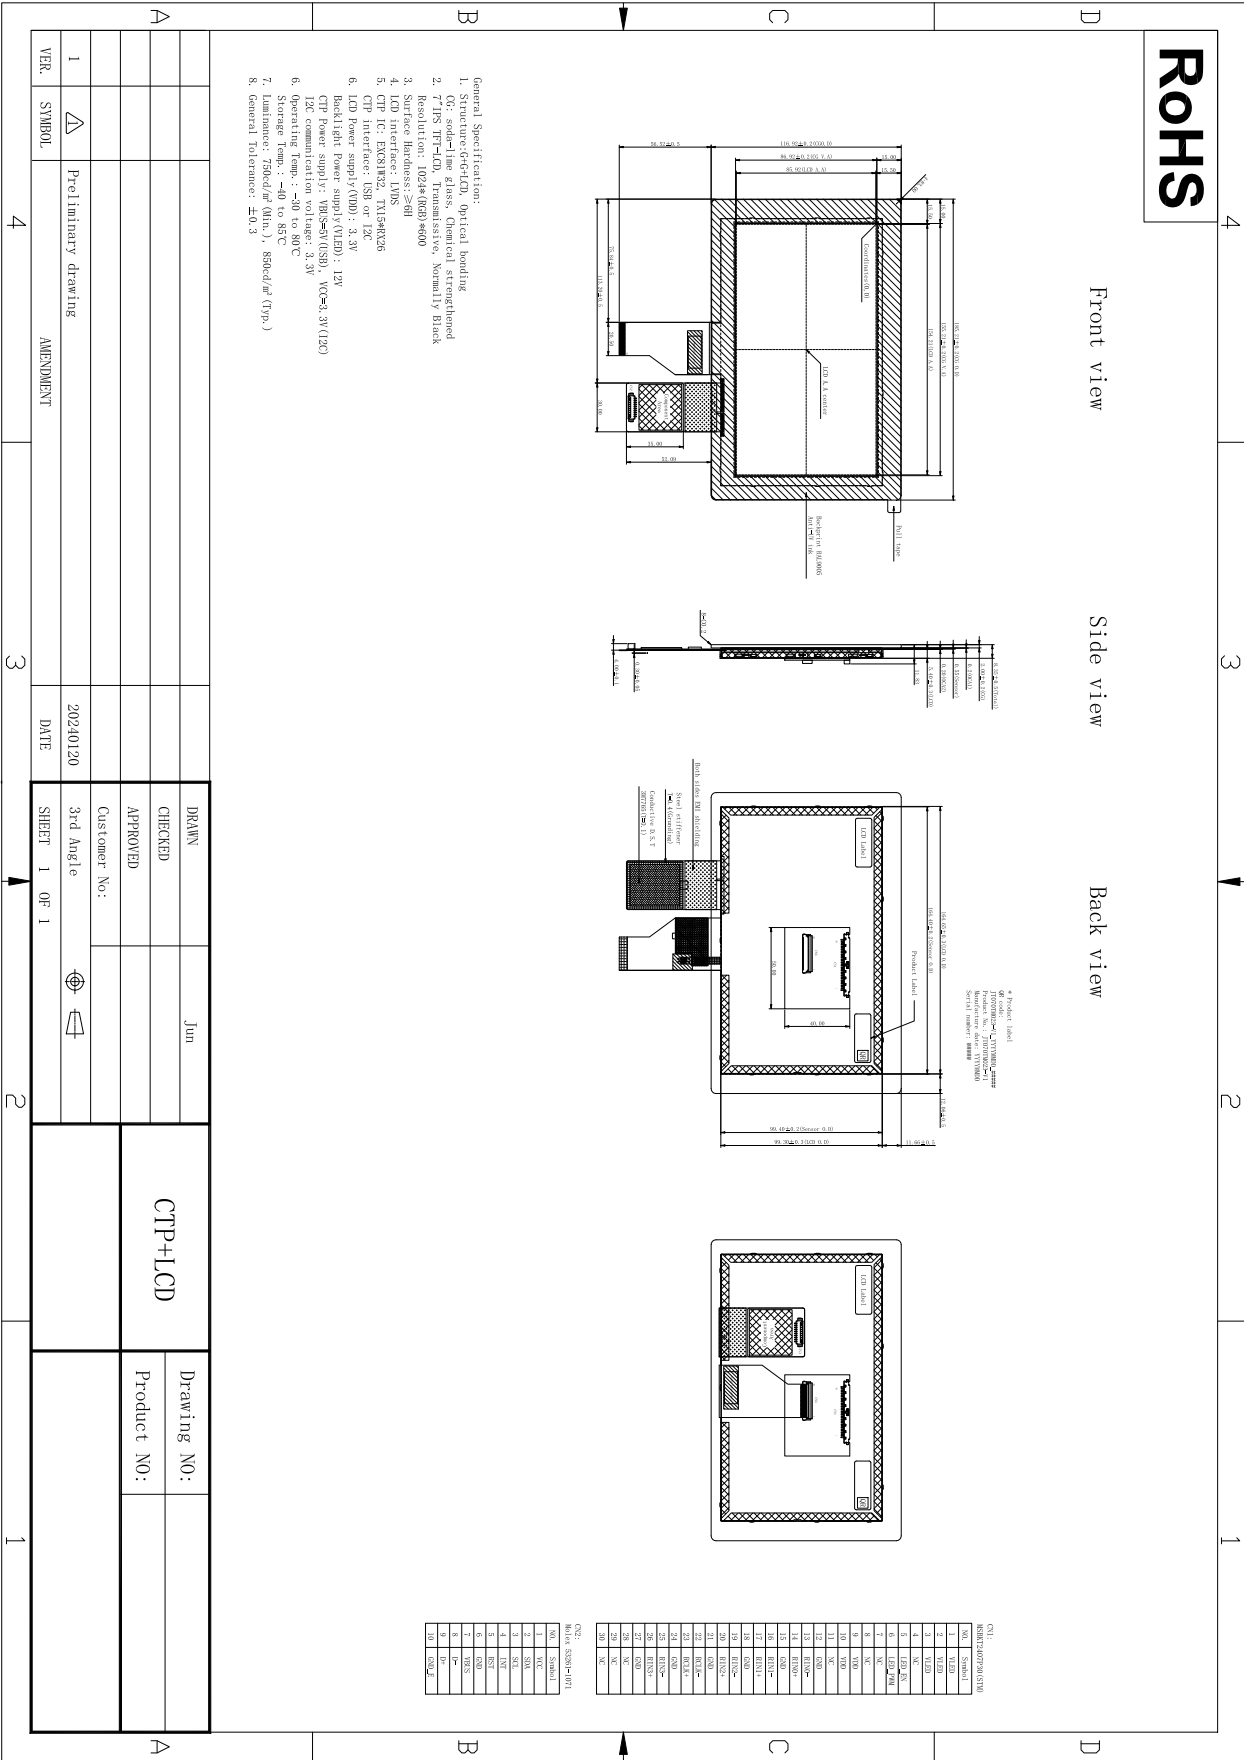

3 Pin assignment

3.1 LCD Pin assignment

CN1 Module Side Connector : STM MSBKT2407P30 or Compatible
User Side Connector : JAE FI-X30H

Pin No.	Symbol	Description
1	VLED	Backlight power supply : +12V
2	VLED	Backlight power supply : +12V
3	VLED	Backlight power supply : +12V
4	NC	Not connection
5	LED_EN	Backlight on/off control
6	LED_PWM	Backlight dimming control
7	GND	Power Ground
8	NC	Not connection
9	VDD	LCD power Supply : +3.3V
10	VDD	LCD power Supply : +3.3V
11	NC	Not connection
12	GND	Power Ground
13	RXIN0-	Negative LVDS differential data input (0)
14	RXIN0+	Positive LVDS differential data input (0)
15	GND	Power Ground
16	RXIN1-	Negative LVDS differential data input (1)
17	RXIN1+	Positive LVDS differential data input (1)
18	GND	Power Ground
19	RXIN2-	Negative LVDS differential data input (2)
20	RXIN2+	Positive LVDS differential data input (2)
21	GND	Power Ground
22	RXCLKIN-	Negative LVDS differential clock input
23	RXCLKIN+	Positive LVDS differential clock input
24	GND	Power Ground
25	RXIN3-	Negative LVDS differential data input (3)
26	RXIN3+	Positive LVDS differential data input (3)
27	GND	Power Ground
28	NC	Not connection
29	NC	Not connection
30	NC	Not connection

3.2 CTP Pin assignment

CN2 Module Side Connector : Molex 53216-1071 or Compatible
 User Side Connector : Molex 51021-1000

Pin No.	Symbol	Description
1	VCC	I2C Power Supply : +3.3V
2	SDA	I2C data signal
3	SCL	I2C clock signal
4	INT	I2C interrupt signal
5	RST	Reset pin, active low
6	GND	Power Ground
7	VBUS	USB Power Supply : +5V
8	D-	USB data port minus
9	D+	USB data port plus
10	GND_E	Power Ground

4 Absolute Maximum Rating

The followings are maximum values which, if exceed, may cause faulty operation or damage to the unit. The operational and non-operational maximum voltage and current values are listed in Table

Parameter	Symbol	Min.	Max.	Unit
Power Supply Voltage	VDD	-0.3	4.0	V
	VCC	-0.3	3.6	V
	VBUS	-0.5	5.5	V
Operating Temperature	T _{OP}	-30	+80	°C
Storage Temperature	T _{ST}	-40	+85	°C

5 Electrical Characteristic

5.1 Driving LCD Panel

Parameter	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Power Supply Voltage	VDD	3.0	3.3	3.6	V	Ta=25℃
Power Supply Current	I _{VDD}	-	TBD	TBD	mA	

5.2 CTP recommended Operating Condition


Parameter	Symbol	Values			Unit	Remark
		Min.	Typ.	Max.		
Power Supply Voltage	VCC	3.0	3.3	3.6	V	Ta=25℃
	VBUS	4.7	5.0	5.3	V	
Power Supply Current	I _{VCC}	-	TBD	TBD	mA	
	I _{VBUS}	-	TBD	TBD	mA	

5.3 Driver LCD Backlight

Parameter		Symbol	Min.	Typ.	Max.	Unit	Remarks
Power Supply Voltage		VLED	10	12	15	V	Ta=25℃
Power Supply Current		I _{VLED}	-	0.4	0.5	A	
EN Signal Voltage	High Level	-	1.65	-	5.25	V	
	Low Level		0	-	0.4	V	
PWM Control Level	High Level	-	1.65	-	5.25	V	
	Low Level		0	-	0.4	V	
PWM Frequency		F _{PWM}	100	-	20000	Hz	
PWM Dimming duty		-	5	-	100	%	
LED Life Time		-	30000	-	-	Hour	Note 1
Power Consumption		P _{LED}	-	6	-	W	

Note 1: The lifetime is determined as the time at which luminance of LED become 50% of the initial brightness or not normal lighting at IPIN=55mA on condition of continuous operating at 25±2℃

5.4 Power on sequence

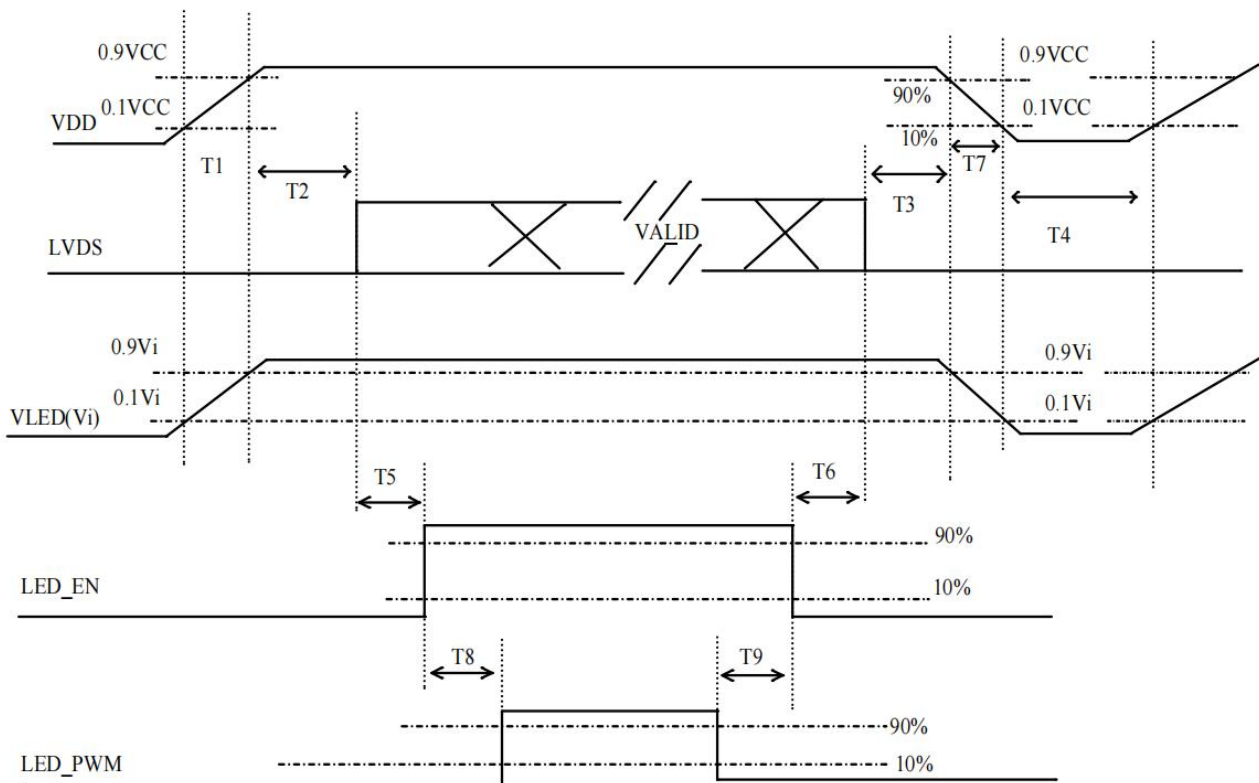

Parameter	Value			Unit
	Min.	Typ.	Max.	
T1	0.5	-	10	ms
T2	0	-	50	ms
T3	0	-	50	ms
T4	500	-	-	ms
T5	200	-	-	ms
T6	20	-	-	ms
T7	5	-	300	ms
T8	10	-	-	ms
T9	10	-	-	ms

Note 1: Please avoid floating state of interface signal at invalid period.




Note 2: When the interface signal is invalid, be sure to pull down the power supply of LCD VDD to 0 V.

Note 3: The Backlight converter power must be turned on after the power supply for the logic and the interface signal is valid. The Backlight converter power must be turned off before the power supply for the logic and the interface signal is invalid.

6 Signal Timing Specification

6.1 AC Electrical Characteristics

Parameter	Symbol	Spec.			Unit	Condition
		Min.	Typ.	Max.		
Clock frequency	R_{XFCLK}	20	-	71	MHz	-
Input data skew margin	T_{RSKM}	500	-	-	pS	$ V_{ID} =400mV$ $R_{XVCM}=1.2V$ $R_{XFCLK}=71MHz$
Clock high time	T_{LVCH}	-	$4/(7 \cdot R_{XFCLK})$	-	ns	-
Clock low time	T_{LVCL}	-	$3/(7 \cdot R_{XFCLK})$	-	ns	-
PLL wake-up time	T_{emPLL}	-	-	150	μs	-

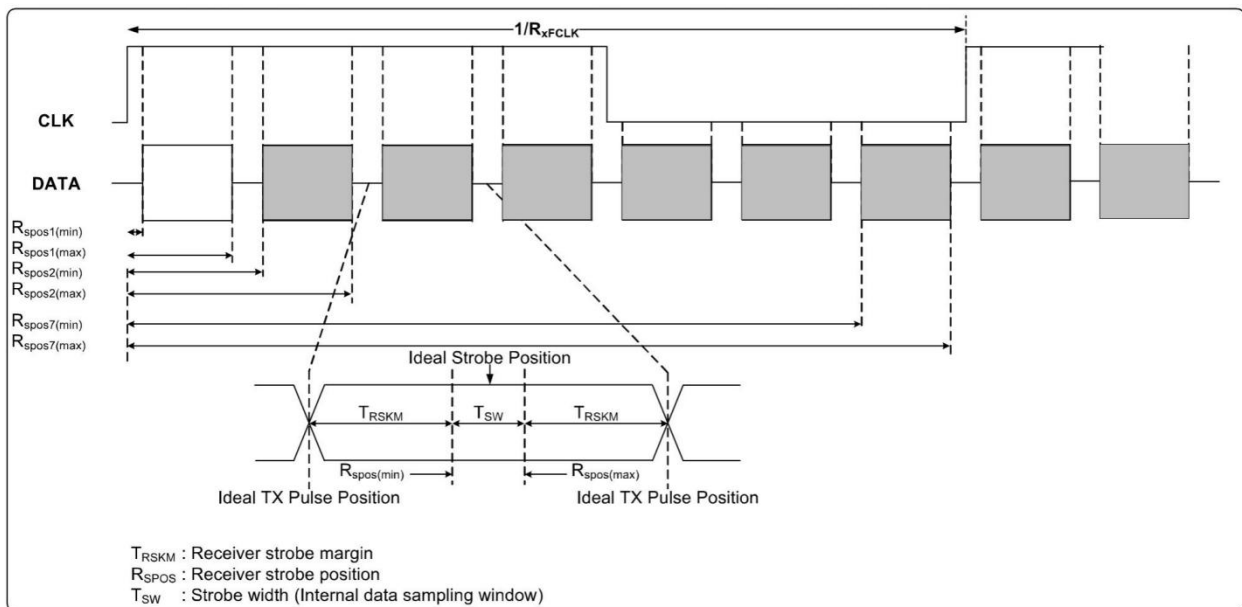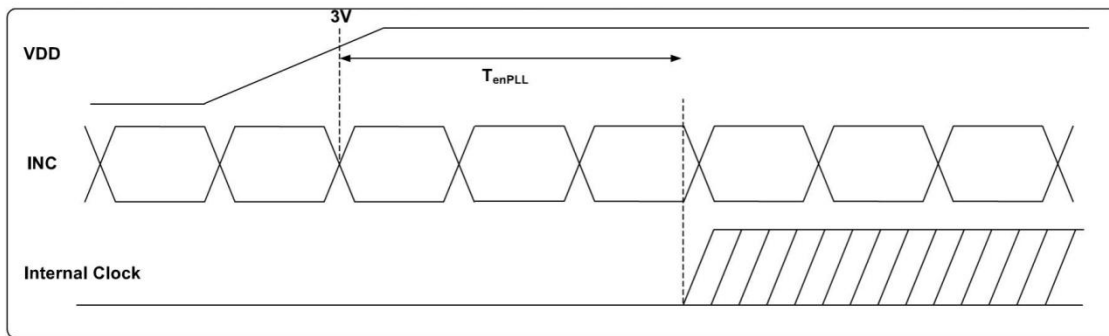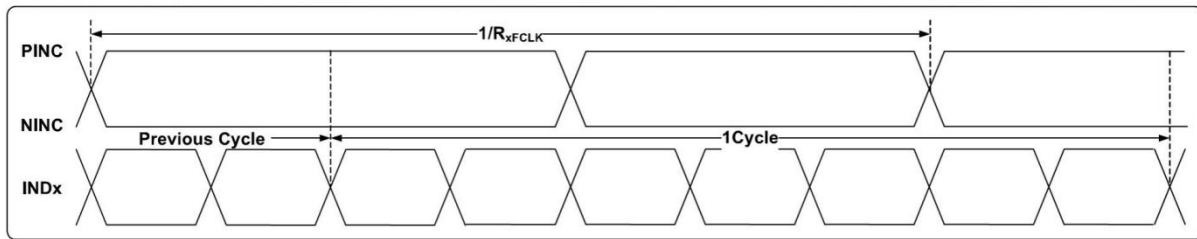


Parameter	Symbol	Spec.			Unit	Condition
		Min.	Typ.	Max.		
Modulation Frequency	SSC_{MF}	23	-	93	KHz	-
Modulation Rate	SSC_{MR}	-	-	± 3	%	LVDS clock =71MHz center spread

SCC table

6.2 DC electrical characteristics

Parameter	Symbol	Spec.			Unit	Condition
		Min.	Typ.	Max.		
Differential input high Threshold voltage	R_{XVTH}	-	-	+0.1	V	$R_{XVCM}=1.2V$
Differential input low threshold voltage	R_{XVTL}	-0.1	-	-	V	
Input voltage range (singled-end)	R_{XVIN}	0	-	$VDD-1.2+ V_{ID} /2$	V	-
Differential input common Mode voltage	R_{XVCM}	$ V_{ID} /2$	-	$VDD-1.2$	V	-
Differential input voltage	$ V_{ID} $	0.2	-	0.6	V	-
Differential input leakage Current	RV_{Xliz}	-10	-	+10	μA	-
LVDS Digital Operating Current	I_{ddlvs}	-	15	30	mA	Fclk=65MHz, VDD=3.3V
LVDS Digital Stand-by Current	I_{stlvs}	-	10	50	μA	Clock & all Functions are stopped

LVDS mode DC Electrical Characteristics

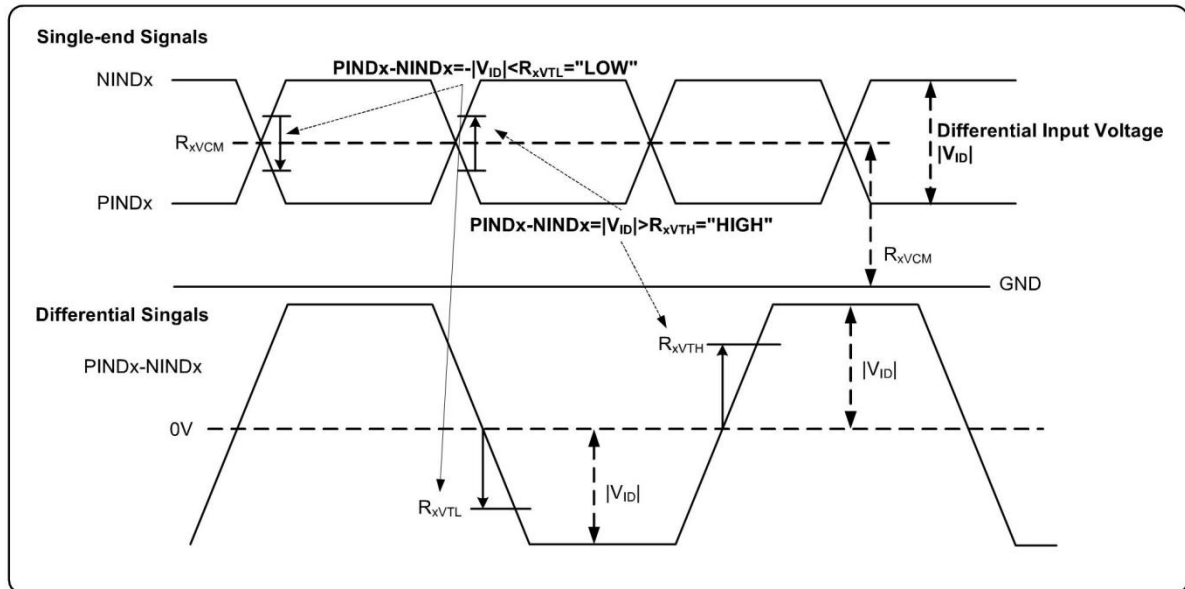

Single-end signals

6.3 Timing Table

- DE mode

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
DCLK Frequency	fclk	40.8	51.2	67.2	MHz
Horizontal Display Area	thd	1024			DCLK
HSD Period	th	1114	1344	1400	DCLK
HSD Blanking	thb+ thfp	90	320	376	DCLK
Vertical Display Area	tvd	600			T _H
VSD Period	tvbp	610	635	800	T _H
VSD Blanking	tvbp+ tvfp	10	35	200	T _H

- HV mode


Horizontal timing

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
DCLK Frequency	fclk	44.9	51.2	63	MHz
Horizontal Display Area	thd	1024			DCLK
HSD Period	th	1200	1344	1400	DCLK
HSD Pulse Width	thpw	1	-	140	DCLK
HSD Back Porch	thbp	160			DCLK
HSD Front Porch	thfp	16	160	216	DCLK

Vertical Timing

Parameter	Symbol	Spec.			Unit
		Min.	Typ.	Max.	
Vertical Display Area	tvd	600			T _H
VSD Period	tv	624	635	750	T _H
VSD Pulse Width	tvpw	1	-	20	T _H
VSD Back Porch	tvbp	23			T _H
VSD Front Porch	tvfp	1	12	127	T _H

6.4 LVDS Data Input Format

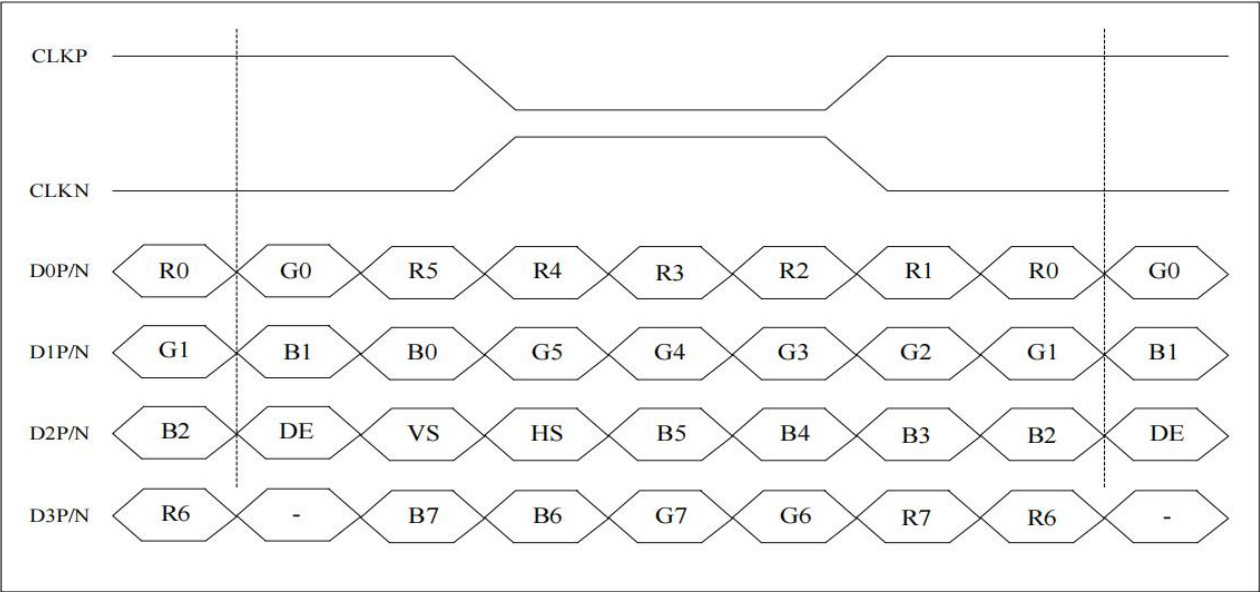


8-bit LVDS input

7 Optical Characteristics

Item		Symbol	Condition	Min.	Typ.	Max.	Unit	Note
Viewing Angle	Horizontal	θ_{X+}	$CR \geqslant 10$	80	-	-	Deg.	(1), (5)
		θ_{X-}		80	-	-	Deg.	
	Vertical	θ_{Y+}		80	-	-	Deg.	
		θ_{Y-}		80	-	-	Deg.	
Luminance (W/ CTP)		L _v	$\theta_X=0^\circ, \theta_Y=0^\circ$	750	850	-	nit	(4), (5)
Uniformity	9 points	$\Delta Y9$		70	-	-	%	(5), (6)
Contrast ratio		CR		900	1000	-		(2), (5)
Color Chromaticity (CIE 1931)	White	W _x	$\theta_X=0^\circ, \theta_Y=0^\circ$ R=G=B=255 Gray scale	Typ- 0.05	0.30	Typ+ 0.05	-	(1), (5)
		W _y			0.33		-	
	Red	R _x			-		-	
		R _y			-		-	
	Green	G _x			-		-	
		G _y			-		-	
	Blue	B _x			-		-	
		B _y			-		-	
	Response Time	T _R +T _F			-		25	

Note (1) Definition of Viewing Angle (θ_x , θ_y):

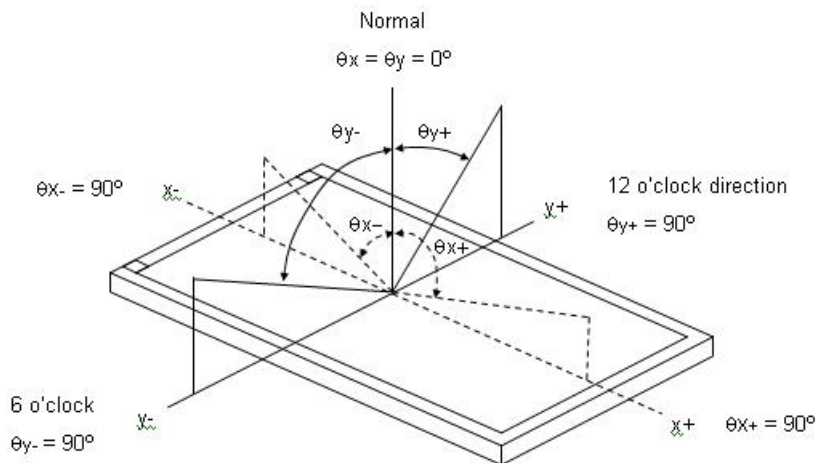

Note (2) Definition of Contrast Ratio (CR):

The contrast ratio can be calculated by the following expression.

$$\text{Contrast Ratio (CR)} = L_{255} / L_0$$


L_{255} : Luminance of gray level 255

L_0 : Luminance of gray level 0

$$CR = CR(5)$$

$CR(X)$ is corresponding to the Contrast Ratio of the point X at Figure in Note (6).

Note (3) Definition of Response Time (T_R , T_F):

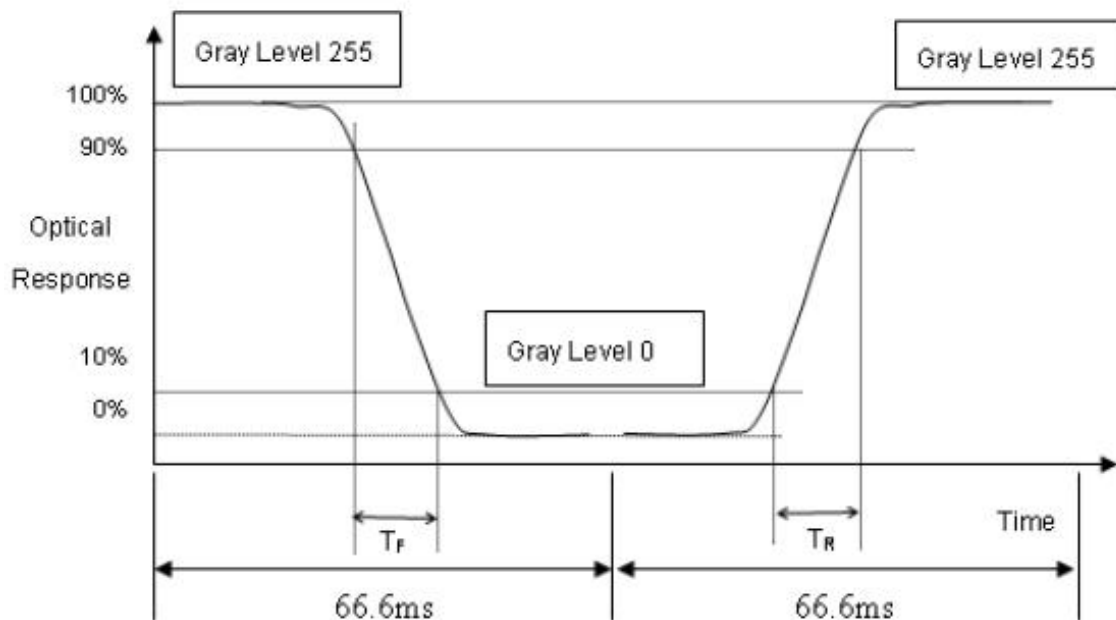

Note (4) Definition of Luminance of White (LC):


Measure the luminance of gray level 255 at center point

$LC = L(5)$

$L(x)$ is corresponding to the luminance of the point X at Figure in Note (6).

Note (5) Measurement Setup:


The LCD module should be stabilized at given temperature for 30 minutes to avoid abrupt temperature change during measuring. In order to stabilize the luminance, the measurement should be executed after lighting Backlight for 30 minutes in a windless room.

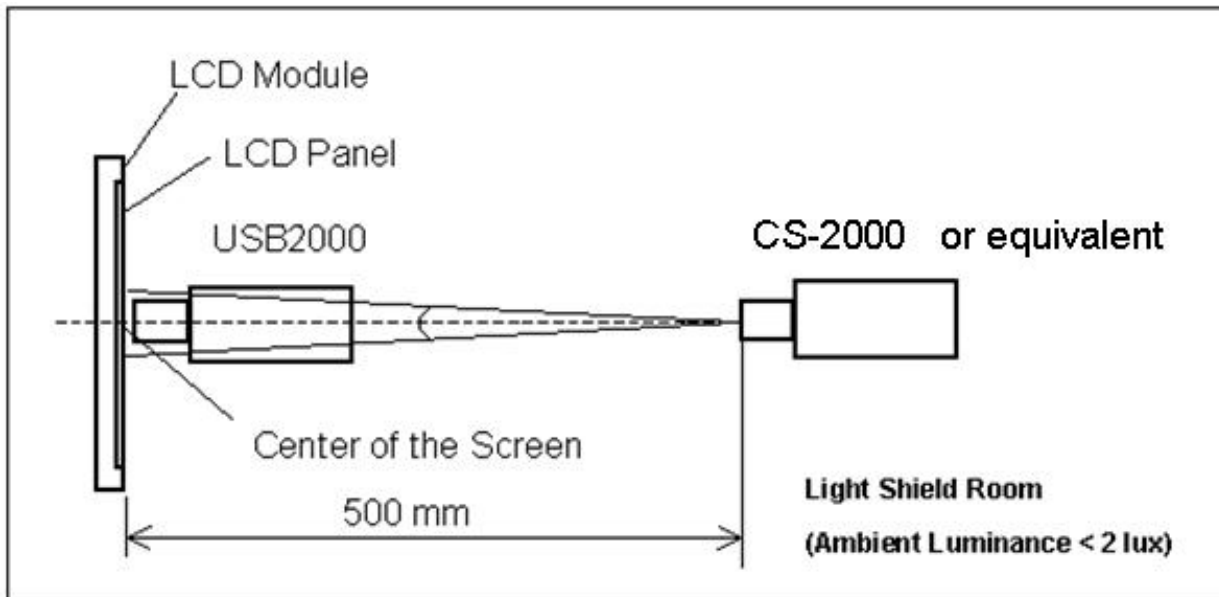

Note (6) Definition of White Variation (δW):

Measure the luminance of gray level 255 at 9 points

$\delta W = (\text{Minimum } [L(1) \sim L(9)] / \text{Maximum } [L(1) \sim L(9)]) * 100\%$

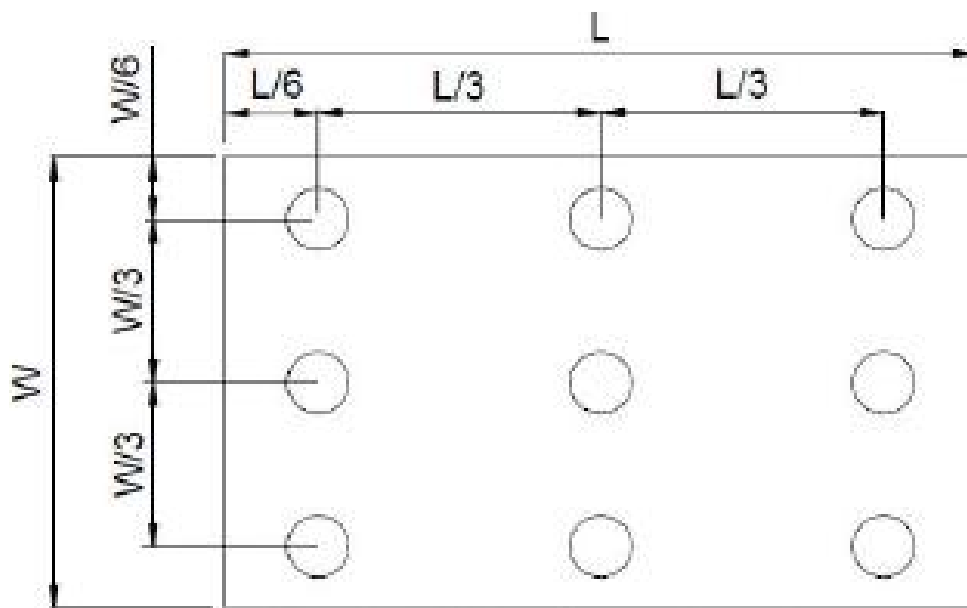

8 Reliability Test

Test Item	Condition
High Temperature Storage Test	85°C, 240 hours
Low Temperature Storage Test	-40°C, 240 hours
High Temperature Operation Test	80°C, 240 hours
Low Temperature Operation Test	-30°C, 240 hours
High temperature & high humidity operation Test	60°C , 90%RH, 240 hours
Thermal Shock(Non-operation)	-30°C/30 min ~ +80°C/30 min, change time:5min, for a total 100 cycles, Start with cold temperature and end with high temperature.
ESD	Contact $\pm 4\text{KV}$, Air $\pm 8\text{KV}$ (R=330R,C=150pF)

Note 1: There should be no condensation on the surface of panel during test.

Note 2: Temperature of panel display surface area should be 85°C Max.

Note 3: At testing Vibration and Shock, the fixture in holding the module has to be hard and rigid enough so that the module would not be twisted or bent by the fixture.

Note 4: In the standard conditions, there is no function failure issue occurred. All the cosmetic specification is judged before reliability test.

Note 5: Before cosmetic and function test, the product must have enough recovery time, at least 24 hours at room temperature.

9 Appearance Inspection

9.1 Inspection Sampling Method:

Unless there is other agreement, the sampling plan for incoming inspection shall follow GB2828.1-2012.

- (1) Lot size: Quantity per shipment as one lot (different model as different lot).
- (2) Sampling type: Normal inspection, single sampling.
- (3) Sampling level: Level II.

9.2 Inspection Conditions

The environmental condition and visual inspection shall be conducted as below:

- (1) Light: 800~1200Lux;
- (2) Vision requirement: Naked or corrected vision of at least 1.0 and no color blindness;
- (3) Inspection background: black and white board is used as the background below the product;
- (4) Inspection distance: 20~30cm from human eyes to the measured surface;
- (5) Inspection Angle: the detected surface is 90 degree from to line of sight, and the measured Object should be rotated 45 degree from side to side;
- (6) Inspection time: 5~10s;

9.3 Inspection equipment

Secondary elements, calipers, feelers, filinka, petroleum ether, ND filter

9.4 Defect code comparison table

Code	Name (Unit)	Code	Name (Unit)
N	Number	D	Diameter (mm)
L	Length (mm)	H	Depth (mm)
W	Width (mm)	S	Distance (mm)
S	Area (mm ²)		

9.5 Inspection precautions

- (1) Inspectors must wear finger gloves and electrostatic bracelets.
- (2) Place the inspected product in front of the inspector, and hold the edge of the product with both hands carefully. Do not bend the product.





9.6 Product region division



Divide the products into nine parts. The center part is area A, and the surrounding part is area B, as shown in the figure below

B	B	B
B	A	B
B	B	B

9.7 Inspection Standards for Modules

CTP and LCD fitting components

Items		Standard	Conclusion	Inspection tools
Dot (white, black, heterochromatic)  $D=(a+b)/2$	A	$D \leq 0.15$	$D \leq 0.15$, it can be disregard.	Visual inspection
		$0.15 < D \leq 0.5$	The distance with another dent or bubble is more than 15 mm, it allows to has two existence	
		$D > 0.3$	NG	
	B	$D \leq 0.2$	$D \leq 0.2$, it can be disregard.	
		$0.2 < D \leq 0.5$	The distance with another dent or bubble is more than 15 mm, it allows to has three existence	
		$D > 0.5$	NG	
Linear defects (fibers/foreign bodies/ scratches, etc.) 	A	$W \leq 0.04$	$W \leq 0.04$, it can be disregard.	Visual inspection
		$0.04 < W \leq 0.06$	$L \leq 6$, the distance with another scratch or impurity is more than 15 mm, it allows to has two existence	
		$0.06 < W \leq 0.09$	$L \leq 6$, the distance with another scratch or impurity is more than 15 mm, it allows to has one existence	
		$W > 0.09, L > 6$	NG	
	B	$W \leq 0.05$	$W \leq 0.05$, it can be disregard.	
		$0.05 < W \leq 0.07$	$L \leq 7$, the distance with another scratch or impurity is more than 15 mm, it allows to has three existence	
		$0.07 < W \leq 0.1$	$L \leq 7$, the distance with another scratch or impurity is more than 15 mm, it allows to has two existence	
		$W > 0.125, L > 8$	NG	
Bubble	A	Zone A is judged according to the point standard		Visual inspection
	B	Zone B is judged according to the point standard		
Edge broken loss 	B	1. The sensor edge creaks, without damaging the line. The function test is OK for reception, and the front side is not visible after fitting. 2. Edge creak on front of cover plate: NG. 3. Back $X < 1.5\text{mm}$; $Y < 1.5\text{mm}$; $Z < GT$ (GT = glass thickness), without affecting the functionality of the product, each side is allowed one, no more than two in total.		Visual inspection
Corner broken loss 	B			

Items		Standard	Conclusion	Inspection tools
Creak	A + B	Creaks found at any location are not allowed		Visual inspection
Newton’s rings	A	No more than 1/3 of the display area, light up invisible. If there are special requirements, the limited sample shall prevail.		
Panel color		Consistent with the sample, no serious color difference		
Size		Meet the requirements of finished product inspection drawings		
Ink pinhole 	B	D≤0.25	Distance of two pinholes greater than 15mm, the paint can be repaired with a paint pen of the same color as the cover plate.	
Ink sawtooth 	A + B	W≤0.2, L≤1	The distance between two serrations near the VA area is greater than or equal to 50mm, two serrations may be allowed.	
Circular White Mura, Lumination Mura, Black/White Mura, etc.	A	Refer to 5% ND filter in 50% Should not be perceived, If needed or limit sample		Visual inspection

10 Notices

10.1 Cautions for storage

Store the module in a dark room where must keep at $25\pm 10^{\circ}\text{C}$ and 65%RH or less. Don't expose the products to the direct sunlight or stresses.

10.2 Cautions for operation

- (1) Do not put a heavy, hard or sharp object on the product.
- (2) Do not bend the product in order to assure the reliability.
- (3) Do not put one product on the other. Otherwise, the product to may be scratched or be changed.
- (4) Do not oile the touch panel, Do not put heavy goods on the touch panel.
- (5) Do not use any organic solvent acid or alkali solution to clean the surface of the product. Please use dry clothes or soft clothes with ethanol to clean the surface.

10.3 Cautions for operation

Light transmission is an important factor for the product. So, please wear clean finger sacks, gloves and mask to protect the products from fingerprint or stain attach, and also must ensure the area where your finger touches is outside the view area when handing the panel.

10.4 Others

- (1) Please note that dew gathering in the panel due to abrupt temperature or humidity change, etc. Which may cause deterioration of performance.
- (2) When this product was built into the package, if there is vulcanization material such as vulcanized rubber which has a possibility of generating the salutation gas near the package since abnormalities will be caused to wring of the product and it will become the cause if functional degradation, please give a constitutional cations.
- (3) Cation for product safety set

Although full care is taken to ensure product quality, failure modes such as degradation, short circuits, or open circuits might be caused, Therefore, to design a product set, please study the effects of any single failure of the panel in advance and consider the safety of product configuration.

Quality function livers for on year, outward appearance haves non-color variation in six months.